

TCCXQ024-G

Telecentric assembly with coaxial illumination for 2/3" detectors, magnification 0.24x, green

参数


光学说明书		
放大	(x)	0.243
图像圈 Ø	(mm)	11
Object distance	(mm)	20.1
物体的视野		
1/3" 探测器(4.8 x 3.6 毫米)	(mm x mm)	19.8 x 14.8
1/2" 探测器 (6.4 x 4.8 毫米)	(mm x mm)	26.3 x 19.8
1/1.8"探测器(7.13 x 5.37 毫米)	(mm x mm)	29.3 x 22.1
2/3"- 5 MP检测器(8.45 x 7.07毫米)	(mm x mm)	34.8 x 29.1
电性能指标		
浅色,峰值波长	green, 520 nm	
Device power ratings		
DC voltage (min)	(V)	12
DC voltage (max)	(V)	24
Power consumption	(W)	< 2.5
Max LED fwd current 1	(mA)	350
LED power ratings		
Forward voltage (typical) 2	(V)	3.3
Forward voltage (max) 2	(V)	4.00
Max pulse current 3	(mA)	2000
大小		
接口	C	
长度	(mm)	235.9
高度	(mm)	88
宽度	(mm)	252.4
重量	(g)	1251
Eye safety		
Risk group according to CEI EN 62471:2010		Risk group 1

注释


1. Used in continuous (not pulsed) mode.
2. At max forward current. Tolerance is ±0.06V on forward voltage measurements.
3. At pulse width ≤ 10 ms, duty cycle ≤ 10% condition. Built-in electronics board must be bypassed (see tech info).

兼容产品

	CMHO 系列 夹具机构
CMHO036	机械固定架

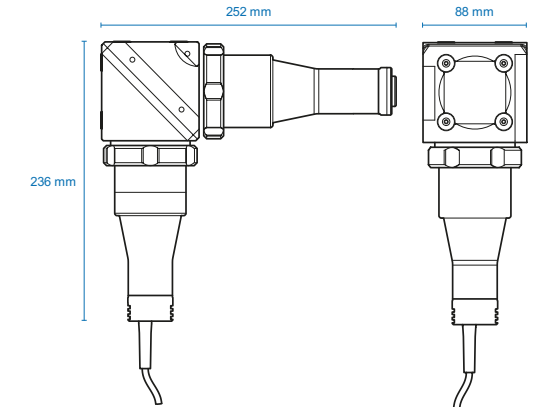

连接器

		Pinout reference	
PIN	FUNCTION	PIN	FUNCTION
1	Earth	3	LED Anode
2	GND	4	Power supply (+12÷24 V)

