

# TCCXQ075-W

Telecentric assembly with coaxial illumination for 2/3" detectors, magnification 0.75x, white

## 参数

### 光学说明书

放大	(x)	0.750
图像圈 Ø	(mm)	11
Object distance	(mm)	82.8

### 物体的视野

1/3" 探测器(4.8 x 3.6 毫米)	(mm x mm)	6.40 x 4.80
1/2" 探测器 (6.4 x 4.8 毫米)	(mm x mm)	8.53 x 6.4
1/1.8"探测器(7.13 x 5.37 毫米)	(mm x mm)	9.51 x 7.16
2/3"- 5 MP探测器(8.45 x 7.07毫米)	(mm x mm)	11.3 x 9.43

### 电性能指标

浅色,峰值波长		white
---------	--	-------

### Device power ratings

DC voltage (min)	(V)	12
DC voltage (max)	(V)	24
Power consumption	(W)	< 2.5
Max LED fwd current 1	(mA)	350

### LED power ratings

Forward voltage (typical) 2	(V)	2.78
Forward voltage (max) 2	(V)	-
Max pulse current 3	(mA)	2000

### 大小

接口		C
长度	(mm)	155.0
高度	(mm)	64
宽度	(mm)	213.5
重量	(g)	1050

### Eye safety

Risk group according to CEI EN 62471:2010		Risk group 1
---	--	--------------

## 注释

1. Used in continuous (not pulsed) mode.
2. At max forward current. Tolerance is ±0.06V on forward voltage measurements.
3. At pulse width ≤ 10 ms, duty cycle ≤ 10% condition. Built-in electronics board must be bypassed (see tech info).


## 兼容产品




CMHO 系列  
夹具机构

CMHO016

机械固定架

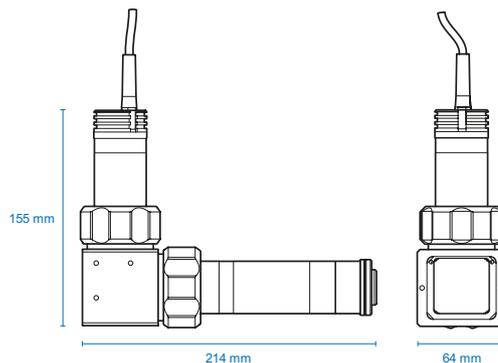

### 连接器



### Pinout reference

PIN	FUNCTION
1	Earth
2	GND
3	LED Anode
4	Power supply (+12÷24 V)

