

TC16M064

适合于35毫米探测器的双远心镜头,放大倍率:0,561 x, F接口

参数

放大	(x)	0.561
图像圈 Ø	(mm)	43.3

物体的视野


2 k x 10µm 探测器	20.48	(mm)	36.5
4k x 7 µm 探测器	28.67	(mm)	51.1
8k x 5 µm 探测器		(mm)	73.1
36 x 24 毫米探测器		(mm x mm)	64.2 x 42.8

光学说明书

操作距离 (1)	(mm)	170.6
wF/# (2)		16
(最大) 典型的远心 (3)	(deg)	< 0.04 (0.08)
典型的失真 (最大) (4)	(%)	< 0.06 (0.15)
景深 (5)	(mm)	4
CTF@ 50 lp/mm	(%)	> 30

机械性能

接口 (6)		F
长度 (7)	(mm)	359.6
直径	(mm)	100
重量	(g)	1380

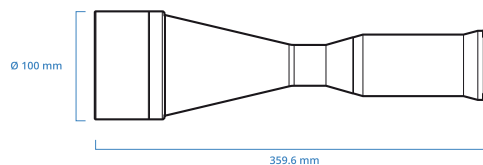

注释

1. 工作距离：机器前端与物体前端之间的距离。其设定在标称值的+/-3%可达到最佳分辨率与最小畸变。
2. 工作F值：当被测物体未放置于离镜头无限远时的真实F值。也可根据需要提供更小的光圈。
3. 镜头内主光线的最大斜率角度：当该角度被转换为毫拉德时，它表示镜头在拍摄时每毫米物体位移的最大测量误差。
4. 相比理想化,无畸变的图像,其真实的图像偏差率:列出了典型(平均)值和最大(保证)值
5. 在景深的边缘，其图像依然能用于测量。但为了获得更好的图像，应考虑采用标称景深的一半。
6. 从镜头最前端的机械结构到相机法兰的长度。

兼容产品

 **LTCLHP 系列**
远心惠普照明

LTCLHP064-R	Telecentric HP illuminator, beam diameter 80 mm, red
LTCLHP064-G	Telecentric HP illuminator, beam diameter 80 mm, green
LTCLHP064-B	Telecentric HP illuminator, beam diameter 80 mm, blue
LTCLHP064-W	Telecentric HP illuminator, beam diameter 80 mm, white

 **LTRN 系列**
适合于Opto Engineering光学器件的LED环形照明器

LTRN064RD	Ring LED illuminator, inner diameter 100 mm, straight type, red 630 nm
LTRN064GR	Ring LED illuminator, inner diameter 100 mm, straight type, green 525 nm
LTRN064BL	Ring LED illuminator, inner diameter 100 mm, straight type, blue 470 nm
LTRN064NW	环形照明器, 白色

 **CMBS 系列**
45度分束器

CMBS064	45° beam splitter with mount for 100 mm clamping diameter optics
---------	--

 **CMMR 系列**
45°表面反射镜

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only.

CMMR064 45° first surface mirror for 100 mm clamping diameter optics



WI064 Protective window for 100 mm clamping diameter optics



CMHO064 机械固定架
