

# TC4M009-C

适合于1.2"探测器的 远心镜头,放大倍率: 2,00 x, C接口

## 参数

放大	(x)	2.000
图像圈 Ø	(mm)	22.0

## 物体的视野 (8)


KAI-2020 14.8毫米对角线 w x h 11.84 x 8.88	(mm x mm)	5.9 x 4.4
KAI-04050 16 毫米 对角线 w x h 12.8 x 9.6	(mm x mm)	6.4 x 4.8
KAI-4022/4021 21.5 毫米 对角线 w x h 15.2 x 15.2	(mm x mm)	7.6 x 7.6
KAI-08050 22.6 毫米 对角线 w x h 18.1 x 13.6 (7)	(mm x mm)	9.1 x 6.8

## 光学说明书

操作距离 (1)	(mm)	62.2
wF/# (2)		22
(最大) 典型的远心 (3)	(deg)	< 0.08 (0.10)
典型的失真 (最大) (4)	(%)	< 0.05 (0.10)
景深 (5)	(mm)	0.3
CTF@ 50 lp/mm	(%)	> 30

## 机械性能

接口		C
长度 (6)	(mm)	170.0
直径	(mm)	45
重量	(g)	180

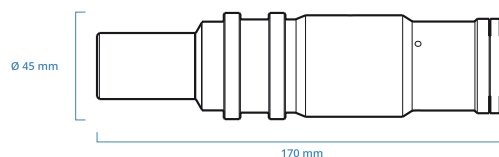


## 注释

1. 工作距离：机器前端与物体前端之间的距离 其设定在标称值的+/-3%可达到最佳分辨率与最小畸变。
2. 工作F值：当被测物体未放置于离镜头无限远时的真实F值。也可根据需要提供更小的光圈。
3. 镜头内主光线的最大斜率角度：当该角度被转换为毫拉德时，它表示镜头在拍摄时每毫米物体位移的最大测量误差。
4. 相比理想化，无畸变的图像，其真实的图像偏差率：列出了典型(平均值)和最大(保证)值。
5. 在景深的边缘，其图像依然能用于测量。但为了获得更好的图像，应考虑采用标称景深的一半。
6. 从镜头最前端的机械结构到相机法兰的长度。使用KAI-08050 (22.6 mm对角线) 探测器时，TC 4M yyy镜头的视野在图像边缘会呈现一些光晕，因为这些镜头是针对1.2"(21.5mm对角线) 探测器而设计。当用"Ø ="表示视野范围时，该直径的圆形物体其图像完全内切在探测器上。


## 兼容产品



LTCLHP023-R	Telecentric HP illuminator, beam diameter 16 mm, red
LTCLHP023-G	Telecentric HP illuminator, beam diameter 16 mm, green
LTCLHP023-B	Telecentric HP illuminator, beam diameter 16 mm, blue
LTCLHP023-W	Telecentric HP illuminator, beam diameter 16 mm, white



LTRN023RD	Ring LED illuminator, inner diameter 28 mm, straight type, red 630 nm
LTRN023GR	Ring LED illuminator, inner diameter 28 mm, straight type, green 525 nm
LTRN023BL	Ring LED illuminator, inner diameter 28 mm, straight type, blue 470 nm
LTRN023NW	环形照明器, 白色



LTRN075R45	Ring LED illuminator, inner diameter 28 mm, oblique type, red 630 nm
------------	--

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only.

LTRN075G45	Ring LED illuminator, inner diameter 28 mm, oblique type, green 525 nm
LTRN075B45	Ring LED illuminator, inner diameter 28 mm, oblique type, blue 470 nm
LTRN075W45	环形照明器, 白色



LTBC series  
Continuous LED backlight

LTBC054054-W	Continuous LED backlight, 54x54 illumination area, white
LTBC054054-G	Continuous LED backlight, 54x54 illumination area, green



CMHO 系列  
夹具机构

CMHO023	机械固定架
---------	-------



LTLAIC series  
Continuous LED low angle diffused ringlights

RT-DLR2-60-050-2-W-24V-FL	Continuous LED low angle diffused ringlight, inner diameter 18 mm, 60°, white
RT-DLR2-60-050-2-R-24V-FL	Continuous LED low angle diffused ringlight, inner diameter 18 mm, 60°, red
RT-DLR2-60-050-2-G-24V-FL	Continuous LED low angle diffused ringlight, inner diameter 18 mm, 60°, green
RT-DLR2-60-050-2-B-24V-FL	Continuous LED low angle diffused ringlight, inner diameter 18 mm, 60°, blue



LTLADC series  
Continuous LED low angle direct ringlights

RT-LLA-75-130-3-W-24V-FL	Continuous LED low angle direct ringlights, inner diameter 94 mm, 75°, white
RT-LLA-75-130-3-R-24V-FL	Continuous LED low angle direct ringlights, inner diameter 94 mm, 75°, red
RT-LLA-75-130-3-G-24V-FL	Continuous LED low angle direct ringlights, inner diameter 94 mm, 75°, green
RT-LLA-75-130-3-B-24V-FL	Continuous LED low angle direct ringlights, inner diameter 94 mm, 75°, blue



LTRNDC series  
Continuous LED direct ringlights

RT-LSW-15-050-2-W-24V-FL	Continuous LED direct ringlight, inner diameter 28 mm, 15°, white
RT-LSW-15-050-2-R-24V-FL	Continuous LED direct ringlight, inner diameter 28 mm, 15°, red
RT-LSW-15-050-2-G-24V-FL	Continuous LED direct ringlight, inner diameter 28 mm, 15°, green
RT-LSW-15-050-2-B-24V-FL	Continuous LED direct ringlight, inner diameter 28 mm, 15°, blue
RT-LSW-45-070-3-W-24V-FL	Continuous LED direct ringlight, inner diameter 35 mm, 45°, white
RT-LSW-45-070-3-R-24V-FL	Continuous LED direct ringlight, inner diameter 35 mm, 45°, red
RT-LSW-45-070-3-G-24V-FL	Continuous LED direct ringlight, inner diameter 35 mm, 45°, green
RT-LSW-45-070-3-B-24V-FL	Continuous LED direct ringlight, inner diameter 35 mm, 45°, blue



LTBFC series  
Continuous flat side-emitting LED backlights

RT-BHDS-25X36-1-W-24V-FL	Continuous flat side-emitting LED backlight, one side edge to edge type, 36X25 illumination area, white
RT-BHDS-25X36-1-R-24V-FL	Continuous flat side-emitting LED backlight, one side edge to edge type, 36X25 illumination area, red
RT-BHDS-25X36-1-G-24V-FL	Continuous flat side-emitting LED backlight, one side edge to edge type, 36X25 illumination area, green
RT-BHDS-25X36-1-B-24V-FL	Continuous flat side-emitting LED backlight, one side edge to edge type, 36X25 illumination area, blue



LTBRDC series  
Continuous LED bar lights

RT-LBRX-00-040-6-W-24V-FL	Continuous LED bar light, 40X26.3 illumination area, white
RT-LBRX-00-040-6-R-24V-FL	Continuous LED bar light, 40X26.3 illumination area, red
RT-LBRX-00-040-6-G-24V-FL	Continuous LED bar light, 40X26.3 illumination area, green
RT-LBRX-00-040-6-B-24V-FL	Continuous LED bar light, 40X26.3 illumination area, blue



LTCXC series  
Continuous LED coaxial lights

RT-CAS2-00-025-X-W-24V-FL	Continuous LED coaxial light, 27x27 active area, white
RT-CAS2-00-025-X-R-24V-FL	Continuous LED coaxial light, 27x27 active area, red

<a href="#">RT-CAS2-00-025-X-G-24V-FL</a>	Continuous LED coaxial light, 27x27 active area, green
<a href="#">RT-CAS2-00-025-X-B-24V-FL</a>	Continuous LED coaxial light, 27x27 active area, blue